

Vertigo 25, 40 & 65 Litre

Horizontal Wall Mount Series

Vertigo is a stylish, space & energy saving hot water system.

Made in Europe, this wall-mounted unit incorporates:

- Twin, dry heating elements ideal in hard water regions.
- The latest 'predictive software' to reduce energy consumption.
- Dual chamber design allows for rapid reheating.

COMFORT

- Space-saving solution suitable for small apartments
- **Premium flat design (less than 30cm depth)**
- Installation only in the horizontal position.
- **Boost function****: 1 shower in less than 30 minutes bathrooms and kitchens

SAVINGS

- **Smart control: Smart system for energy savings, learning consumer habits**
- Accurate electronic thermostat and finest temperature control to guarantee safe operating
- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings

QUALITY - DURABILITY

- **Extra lifetime of the heating element** thanks to Double tank Steatite technology: double ceramic dry heating element, adapted to highly mineralized, hard or desalinated water
- Magnesium anode for increased protection of the tank
- New generation Diamond-quality enamel
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid rust around flange
- IP 24 - Full compliance with New Zealand and Australian Standards for electrical safety and user protection

USER-FRIENDLINESS


- Intuitive user-friendly interface with quick modes selection knob
- Easy installation with wall mounting plates and drilling template

POWER REQUIREMENTS

- Requires a dedicated, single phase 10AMP circuit



 <p>7 year tank warranty</p>	 <p>5 year tank labour</p>	 <p>3 year element warranty</p>
 <p>Smart control function Energy savings</p>	 <p>Dry heating element</p>	<p>MAGNESIUM ANODE</p> <p>Tank protection</p>

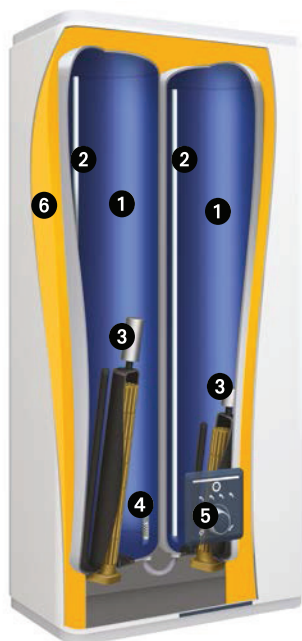

- 1 Power light indicator
- 2 Boost mode*: quick heating in order to recover 1 shower in less than 30 min
- 3 Smart shower display showing quantity of hot water remaining (fixed) or being produced (blinking)
- 4 Manual mode: manual selection of hot water quantity
- 5 Frost-free mode (7°C)
- 6 Manual selection (from 50°C to 70°C max)
- 7 Smart mode: automatic operation according to consumer's habits thanks to a self learning program
- 8 Quick mode selection control knob



- 1 Diamond-quality enamel
- 2 Optimised stainless steel outlet pipe
- 3 Steatite dry heating element with magnesium anode
- 4 Inlet diffuser
- 5 Digital interface
- 6 High-density polyurethane foam 0 % CFC




Ceramic dry heating element + enamelled steel sleeve. Steatite technology: state-of-the-art ultimate technology for the best long-lasting service



INSTALLATION DIMENSIONS (in mm)

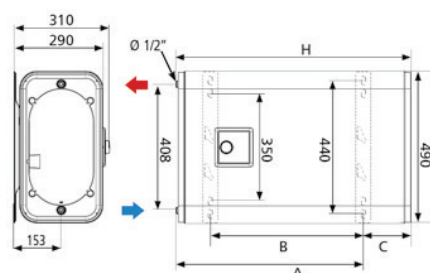

Safe Tray
310 mm W x 510 mm L x 60 mm D
Part number: 746160
Colour: White
Trays can be interconnected



Plumbing Cover
290mm W x 490mm L x 320 mm D
Part number: 341068
Colour: White

VERTIGO STEATITE

TECHNICAL DATA

MODEL	REAL CAPACITY (L)	INSTALLATION	MAXIMUM POWER OUTPUT (W)	POWER OUTPUT EXIT TANK (W)	POWER OUTPUT ENTRY TANK (W)	TOTAL HEAT-UP TIME $\Delta T=50^{\circ}\text{C}$	HEAT-UP TIME EXIT TANK (WITHOUT BOOST)
VERTIGO STEATITE 823014	25	Horizontal	1 000	1 000	1 000	1h32	0h46
VERTIGO STEATITE 833019	40	Horizontal	2 250	1 500 + 750	1 000	2h02	0h49
VERTIGO STEATITE 843039	65	Horizontal	2 250	1 500 + 750	1 000	4h04	1h38

DIMENSIONS

MODEL	HEIGHT (H)	WIDTH (W)	DEPTH ** (D)	DIMENSIONS (mm)				NET WEIGHT (kg)	ERP ENERGY CLASS
				A	B	C	D		
VERTIGO STEATITE 823014	601	490	290	440	280	310	155	25	B
VERTIGO STEATITE 833019	765	490	290	610	500	310	155	28	B
VERTIGO STEATITE 843039	1090	490	290	1185	800	310	115	39	B

**Not available in the 25 litre model