

Vertigo 80 Litre

Vertical or Horizontal Wall Mount

Vertigo is a stylish, space & energy saving hot water system. Made in Europe, this wall-mounted unit incorporates:

• Twin, dry heating elements ideal in hard water regions.

• The latest 'predictive software' to reduce energy consumption.

• Dual chamber design allows for rapid reheating.

COMFORT

- Space-saving solution suitable for small apartments
- Premium flat design (less than 30cm depth)
- Installation: The Vertigo can be installed in either the vertical or horizontal position and is ideal in bathrooms, laundries and en-suites.
- Boost function**: 1 shower in less than 30 minutes

SAVINGS

- Smart control: Smart system for energy savings, learning consumer habits
- Accurate electronic thermostat and finest temperature control to guarantee safe operating
- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings

QUALITY - DURABILITY

- Extra lifetime of the heating element thanks to Double tank Steatite technology: double ceramic dry heating element, adapted to highly mineralized, hard or desalinated water
- Magnesium anode for increased protection of the tank
- New generation Diamond-quality enamel
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid rust around flange
- IP 24 Full compliance with New Zealand and Australian Standards for electrical safety and user protection

USER-FRIENDLINESS

- Intuitive user-friendly interface with quick modes selection knob
- Easy installation with wall mounting plates and drilling template

POWER REQUIREMENTS

• Requires a dedicated, single phase 10AMP circuit












- Power light indicator
- 2 Boost mode*: quick heating in order to recover 1 shower in less than 30 min
- 3 Smart shower display showing quantity of hot water remaining (fixed) or being produced (blinking)
- 4 Manual mode: manual selection of hot water quantity
- Frost-free mode (7°C)
- 6 Manual selection (from 50°C to 70°C max)
- 7 Smart mode: automatic operation according to consumer's habits thanks to a self learning program
- 8 Quick mode selection control knob


- 1 Diamond-quality enamel
- 2 Optimised stainless steel outlet pipe
- 3 Steatite dry heating element with magnesium anode
- 4 Inlet diffuser
- 5 Digital interface
- 6 High-density polyurethane foam 0 % CFC



Ceramic dry heating element + enamelled steel sleeve. Steatite technology: state-of-the-art ultimate technology for the best long-lasting service



INSTALLATION DIMENSIONS (in mm)

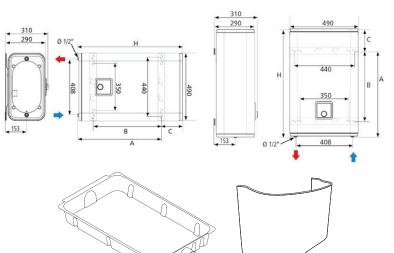

Safe Tray 310 mm W x 510 mm L x 60 mm D Part number: 746160 Colour: White Trays can be interconnected

Plumbing Cover 290mm W x 490mm L x 320 mm D Part number: 341068 Colour: White

VERTIGO STEATITE Multiposition installation

TECHNICAL DATA

MODEL	REAL CAPACITY (L)	INSTALLATION	MAXIMUM POWER OUTPUT (W)	POWER OUTPUT EXIT TANK (W)	POWER OUTPUT ENTRY TANK (W)	TOTAL HEAT-UP TIME ∆T=50°C	HEAT-UP TIME EXIT TANK (WITHOUT BOOST)
VERTIGO STEATITE 853070	80	V/H	2 250	1 500 + 750	1 000	3h19	1h19

DIMENSIONS

MODEL	HEIGHT (H)	WIDTH (W)	DEPTH** (D)	DIMENSIONS (mm)				NET WEIGHT	ERP ENERGY
				A	В	С	D	(kg)	CLASS
VERTIGO STEATITE 853070	1300	490	290	975	700	310	115	33	B